

WALL-MOUNTED : STANDARD Non-Inverter Single-Split Type




CS-PV9TKH-1 | CS-PV12TKH-1



Wireless



Wired (Optional)

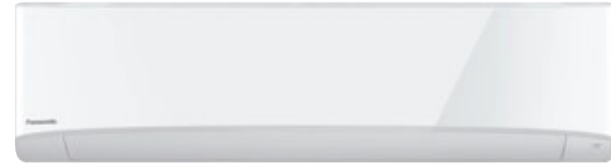

CS-PV18TKH-1 | CS-PV24TKH-1 | CS-PV28TKH-1



Wireless



Wired (Optional)

SPECIFICATIONS

MODEL		(50Hz)	CS-PV9TKH-1 [CU-PV9TKH-1]	CS-PV12TKH-1 [CU-PV12TKH-1]	CS-PV18TKH-1 [CU-PV18TKH-1]	CS-PV24TKH-1 [CU-PV24TKH-1]	CS-PV28TKH-1 [CU-PV28TKH-1]
Cooling Capacity	kW		2.70	3.52	5.33	6.85	7.92
	Btu/h		9,210	12,000	18,200	23,400	27,000
EER	Btu/hW		10.96	11.01	9.73	9.79	9.64
Electrical Data	Voltage	V	230	230	230	230	230
	Current	A	3.7	5.0	8.3	10.5	13.0
	Power Input	W	840	1,090	1,870	2,390	2,800
Moisture Removal	L/h		1.6	2.0	2.9	3.9	4.6
	Pt/h		3.4	4.2	6.1	8.2	9.7
Air Circulation	Indoor	m ³ /min (ft ³ /min)	9.6 [340]	10.1 [356]	18.9 [667]	20.6 [727]	20.8 [734]
	Outdoor	m ³ /min (ft ³ /min)	28.8 [1,020]	33.3 [1,180]	35.2 [1,240]	40.3 [1,420]	54.4 [1,920]
Noise Level	Indoor (H / L)	dB [A]	38/26	41/29	43/39	47/42	50/46
	Outdoor (H / L)	dB [A]	48	52	54	56	57
Dimensions	Height	mm	290 [511]	290 [542]	302 [619]	302 [619]	302 [695]
		inch	11-7/16 [20-1/8]	11-7/16 [21-11/32]	11-29/32 [24-3/8]	11-29/32 [24-3/8]	11-29/32 [27-3/8]
	Width	mm	799 [650]	799 [780]	1,102 [824]	1,102 [824]	1,102 [875]
		inch	31-15/32 [25-19/32]	31-15/32 [30-23/32]	43-13/32 [32-15/32]	43-13/32 [32-15/32]	43-13/32 [34-15/32]
	Depth	mm	197 [230]	197 [289]	244 [299]	244 [299]	244 [320]
		inch	7-3/4 [9-1/16]	7-3/4 [11-13/32]	9-5/8 [11-25/32]	9-5/8 [11-25/32]	9-5/8 [12-5/8]
Net Weight	Indoor	kg (lb)	8 [18]	8 [18]	12 [26]	12 [26]	12 [26]
	Outdoor	kg (lb)	22 [49]	29 [64]	34 [75]	40 [88]	54 [119]
Refrigerant Pipe Diameter	Liquid Side	mm	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35
	Gas Side	inch	1/4	1/4	1/4	1/4	1/4
Pipe Extension	Chargeless Pipe Length	m	7.5	7.5	7.5	7.5	7.5
	Maximum Pipe Length	m	20	20	30	30	30
	Maximum Elevation Length	m	15	15	20	20	20
	Additional Refrigerant Gas*	g/m	10	10	20	30	30
Power Supply		Indoor	Indoor	Indoor	Indoor	Outdoor	

Caution For CS-PV9/PV12/PV18/PV24/PV28TKH-1 (Important) Please do not use copper pipes that are less than 0.6mm in thickness.
*When pipes are not extended from the chargeless pipe length, the required amount of refrigerant is already in the unit.

EASY-TO-USE REMOTE CONTROLLER

Panasonic's wireless remote controller features a large Liquid Crystal Display (LCD) panel which makes it even more user-friendly. So you can sit back and enjoy easy operation and long-lasting comfort from your Panasonic Air Conditioner.

- LCD display for an easy overview of the operation status.
- Automatic Intelligence switches fan speed for faster cooling with just one touch of a button.
- Quiet function allows you to sleep comfortably at night.
- Adjusts the fan speed.
- Press up or down to set the temperature.
- Toggles between iAUTO, COOL and DRY setting mode.
- Delays off timer with temperature control for better sleep.
- Set the airflow.
- Set the 24-hour ON & OFF Timer.
- Set the actual time (hour and minute).




Wireless
Applicable to STANDARD Non-Inverter




TO SET THE TIMER

To turn the unit ON or OFF at a preset time.



Select ON or OFF Timer




Set the time.



Confirm.



COOLING MODELS

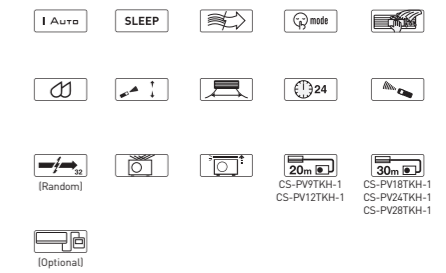

OUTDOOR



CU-PV9TKH-1



CU-PV12TKH-1



CU-PV18TKH-1
CU-PV24TKH-1



CU-PV28TKH-1

**Not applicable for EER Label